# **ENVR2 PLUS APPLIANCE**



4 TB

3-YEAR WARRANTY

The second generation of ES Appliances, ENVR2 Plus, is Avigilon's smallest appliance that unlocks Avigilon's Next-Generation Video Analytics capabilities for any connected video stream. It supports Classified Object Detection (COD), Appearance Search, Facial Recognition and License Plate Recognition (LPR) capabilities for up to eight cameras<sup>1</sup>. With cybersecurity reinforced by Avigilon's hardened OS, a distributed and threat-resistant network of ENVR2 Plus appliances provides security teams with complete coverage and centralized management of large geographies while preserving situational awareness and minimizing bandwidth usage over Wide Area Networks (WAN).



### **FEATURES**



#### **APPEARANCE SEARCH ON THIRD-PARTY CAMERAS**

Quick and accurate search for a person of interest or object to take action and aid in better outcomes in forensic investigations on any third-party camera.



#### **LOWER CAPEX**

Non-analytic legacy cameras are utilized to run analytics, thereby reducing the burden of new investment, lowering the cost of on-prem hardware, and promoting the democratization of AI on all cameras. Upgrade ENVR2 Plus remotely with a single signed and encrypted firmware package.



#### **NEXT GENERATION VIDEO ANALYTICS**

Go beyond people and vehicle classification and improve object classification of over 50 objects, faster forensic investigations to alert a match for person or vehicle on a watchlist using facial recognition, LPR and provide better perimeter protection for critical sites.



#### **IMPROVE SCALE, SPEED, AND SECURITY**

Hybrid Architecture enables appliances and devices to run multiple analytics services concurrently and on-demand, share resources within the site using on-prem hardware or our Avigilon Cloud Services. Allows maximization of computing resources across the infrastructure.





Reduce playback bandwidth using HDSM when viewing video feed and only transmit what you need, when you need, optimized. Bring the recording closer to the camera, thereby reducing video feed latency and stability of camera stream networking.

<sup>1</sup> ENVR2 Plus supports any Avigilon camera or 3rd-party ONVIF-compliant camera.

ONVIF is a trademark of Onvif, Inc.





### **ANALYTICS**

# CLASSIFIED OBJECT DETECTION™ (COD)



Detects and classifies people or vehicles to help operators respond faster. Unusual Activity Detection (UAD) automatically detects atypical behavior of learned objects.



Quickly locates a specific person or vehicle of interest across an entire site using a sophisticated deep learning Al search engine.

**AVIGILON APPEARANCE** 

SEARCH™ (AS)



additional license.

**FACE RECOGNITION (FR)** 

Detects matches from managed

watchlists to alert operators of

people of interest. Requires

Appearance Search and an

ACC7-FACE license required

# ACC7-VAC license required NO FACE MASK DETECTION



Determines whether a person is not wearing a face mask to help prevent community transmission.

ACC Enterprise required



}

#### **OCCUPANCY COUNTING**

With cameras at entrances and exits, a running total of occupancy can be monitored in real time.



ACC Enterprise required



#### **LICENSE PLATE RECOGNITION**

Works with ACC software for accurate license plate capture at a range of distances and speeds.

ACC7-LPR license required

	ANALYTICS CAMERAS <sup>1</sup>		NON-ANALYTIC CAMERAS <sup>1</sup>			NUMBER OF LPR LANES <sup>2</sup>					
						DE	FAULT MO	DE	PERFO	RMANCE I	MODE <sup>5</sup>
MODEL	AS ONLY4	AS+FR <sup>4</sup>	COD ONLY3	COD+AS4	COD+AS +FR <sup>4</sup>	<b>10 FPS</b> <48 KM/H	<b>20 FPS</b> <100 KM/H	<b>30 FPS</b> <150 KM/H	<b>10 FPS</b> <48 KM/H	<b>20 FPS</b> <100 KM/H	<b>30 FPS</b> <150 KM/H
ENVR2-PLUS	20	11	8	8	4	2	1	-	6	3	2

<sup>1</sup> These performance figures are based on validation testing by Avigilon, using Avigilon Control Center 7.14.16 software. Assumes appliance-wide average per camera rates of classified objects leaving the field of view: H5A cameras – one every second; H4A cameras – one every two seconds; non-analytics cameras running COD – one every second.

#### **DEVICE TYPES SUPPORTED FOR ANALYTICS**

Avigilon H.264 Analog Encoders

Avigilon HD H.264, H3, H3 Multisensor, H4 SL, H4 Mini dome, H4 Box, H4 Bullet, H4 Dome, and H4 Pro cameras

Avigilon H4A cameras operating for Unusual Motion Detection

Avigilon H5Pro and H4 Multisensor (in high frame-rate mode), H5M, and H5SL cameras

ONVIF® Profile S cameras

**ONVIF** encoders

Third-party devices (MJPEG, MPEG4, H.264, H.265/HEVC) supported by ACC. For more information, see avigilon.com/products/acc/supported-cameras.

<sup>&</sup>lt;sup>2</sup> Assumes a 3MP camera with 1MP license plate scan area and Frames Per Second (FPS) to recognize license plates up to vehicle speeds in Kilometers Per Hour (KM/H). Results may vary according to camera mounting parameters.

<sup>&</sup>lt;sup>3</sup> For cameras at 2MP and 30 frames per second (fps).

<sup>4</sup> Requires H5A, H4A cameras, or Classified Object Detection running on non-analytic cameras.

<sup>&</sup>lt;sup>5</sup> Requires LPR Performance mode to be enabled. See the ENVR2 Plus user guide for more information.

# **SPECIFICATIONS**

SYSTEM		ENVR2-PLUS-8P8	ENVR2-PLUS-8P4				
Capacity		8 TB	4 TB				
Avigilon Control Center™ Edition		Core, Standard, and Enterprise* compatible (ACC camera licenses are sold separately)					
Network Video	Network Connection	1GbE Networking					
Streaming Performance	Recording Rate		Up to 130 Mbps				
	Playback Rate		Up to 80 Mbps				
Operating System		Avigilon Hardened OS, supports secure remote upgrades					
OS Drive		1	16 GB eMMC 5.1 Flash				
Storage Capacity		1 × 3.5" SATA 3 hard drive, 8 TB	1 × 3.5" SATA 3 hard drive, 8 TB 1 × 3.5" SATA 3 hard drive, 4 TB				
PoE+ Ports		8 × RJ4	8 × RJ45 10/100 Mbps (IEEE 802.3at)				
Total PoE Power Bu	udget		125 W				
PoE Power per Por	t	0-30 W (sum of all ports	must be below the Total PoE Power Budget)				
Network Interface		2 × 1 G	2 × 1 GbE RJ-45 ports (1000Base-T)				
External I/O Termin	als	4 digita	al inputs and 4 relay outputs				
Memory			8GB 128-bit LPDDR4x				
Processor (CPU+GI	PU)	NVIDIA Je	NVIDIA Jetson System-on-Module (SOM)				
Local Viewing		No video outpu	No video outputs — Web-based administration only				
Warranty		3-year warranty					
* Avigilon Appeara	nce Search and facial recogni	tion requires Enterprise version of the ACC software	a.				
ELECTRICAL							
Power Input		100	100 to 240 V AC, 3A; 50/60 Hz				
Power Supply		Single e	Single external, 54 V DC, 4.26A, 230W				
SUPPLIED ACCI	ESSORIES						
Wall/Desk Mount K	Cit	Includes wall mount brackets, mounting screws, and drywall anchors Optional rack mount and DIN rail mount kits available					
Peripherals		1 external power supply and 1 digital IO terminal block with screwdriver					
CERTIFICATION	IS						
Certifications/Direc		UL, cUL, CE, RCM, UKCA, RoHS, Reach (SVH)	C)				
Safety		UL/CSA/IEC/EN 62368-1					
Electromagnetic Emissions		FCC Part 15 Subpart B Class B, ICES-003 Class B, EN 55032 Class B, EN 55011 Class B Group 1, EN 61000-6-3, EN 61000-3-2, EN 61000-3-3					
Electromagnetic Immunity		EN 55035, EN 61000-6-1					
ENVIRONMENT	AL	OPERATING	STORAGE				
Temperature		0° C to 50° C (32° F to 122° F)	-30° C to 70° C (-22° F to 158° F)				
Humidity		95% relative humidity @ 40° C (104° F), non- condensing	95% relative humidity @ 60° C (140° F), non- condensing				
SUPPORTED AN	NALYTICS EVENTS						
Objects in Area			The event is triggered when the selected object type moves into the region of interest.				
Objects in Area		The event is triggered when the selected obj	ect type moves into the region of interest.				

SUPPORTED ANALYTICS EVENTS			
Objects Crossing Beam	The event is triggered when the specified number of objects have crossed the directional beam that is configured over the camera's field of view. The beam can be unidirectional or bidirectional.		
Object Appears or Enters Area	The event is triggered by each object that enters the region of interest. This event can be used to count objects.		
Object Not Present in Area	The event is triggered when no objects are present in the region of interest.		
Objects Enter Area	The event is triggered when the specified number of objects have entered the region of interest.		
Objects Leave Area	The event is triggered when the specified number of objects have left the region of interest.		
Object Stops in Area	The event is triggered when an object moves into a region of interest and then stops moving for the specified threshold time.		
Direction Violated	The event is triggered when an object moves in the prohibited direction of travel.		
Tamper Detection	The event is triggered when the scene unexpectedly changes.		


## **OUTLINE DIMENSIONS**


[X.X]	INCHES
Х	MM

FORM FACTOR WEIGHT
1U chassis 1.14 kg [2.5 lbs]

#### **DIMENSIONS (L × W × H)**

254.5 mm × 195.0 mm × 44.45 mm [10.0" × 7.67" x 1.75"]



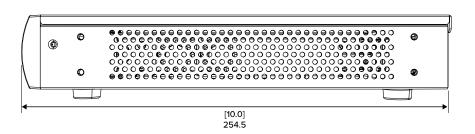

### **ORDERING INFORMATION**

ENVR2-PLUS-8P8	ENVR2 Plus 8 TB with Avigilon Control Center
ENVR2-PLUS-8P4	ENVR2 Plus 4 TB with Avigilon Control Center

Avigilon Control Center licenses must be purchased separately.

Avigilon Appearance Search and facial recognition requires Enterprise version of the ACC software.

ENVR2-PLUS-8Pn-NA



ENVR2-PLUS-8Pn-UK



ENVR2-PLUS-8Pn-EU



ENVR2-PLUS-8Pn-AU



#### **SOFTWARE LICENSES**

ACC7-ENT	ACC 7 Enterprise Edition license
ACC7-STD	ACC 7 Standard Edition license
ACC7-COR	ACC 7 Core Edition license
ACC7-VAC	ACC 7 Video Analytics feature channel license — Required for Classified Object Detection
ACC7-FACE	ACC 7 Face feature channel license
ACC7-FACE-10C	ACC 7 Face feature 10 channel license
ACC7-LPR	ACC 7 LPR lane license

#### **OPTIONAL ACCESSORIES**

PS-ENVR2-8P	Replacement power adapter without the power cord
RMS1U-ENVR2-8P	Rack mount installation kit
DIN-ENVR2-8P	DIN rail mount installation kit

### **SUPPORT**

Learn more and find additional documentation at avigilon.com or email sales@avigilon.com for specific product support.





Oct 2022 | Rev 1

© 2022, Motorola Solutions, Inc. All rights reserved. MOTOROLA, MOTO, MOTOROLA SOLUTIONS, and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. AVIGILON, the AVIGILON logo, AVIGILON CONTROL CENTER, ACC, HDSM SmartCodec and LIGHTCATCHER are trademarks of Avigilon Corporation. The absence of the symbols ™ and ® in proximity to each trademark in this document or at all is not a disclaimer of ownership of the related trademark. All other trademarks are the property of their respective owners.

sales@avigilon.com | avigilon.com

5