

B-2T

Flush-mounted magnetic contact


b2T_en 09/25

The B-2T magnetic contact is used to detect the opening of doors, windows, etc. It is designed for flush mounting. It is available in white (B-2T) and brown (B-2T BR).

1. Description

The B-2T magnetic contact consists of a reed switch and a magnet (Fig. 1). Moving the magnet away from the reed switch (by opening the door or window) opens the reed switch contacts.

The reed switch and the magnet are placed in plastic enclosures. The reed switch has screw terminals for connecting the wires.

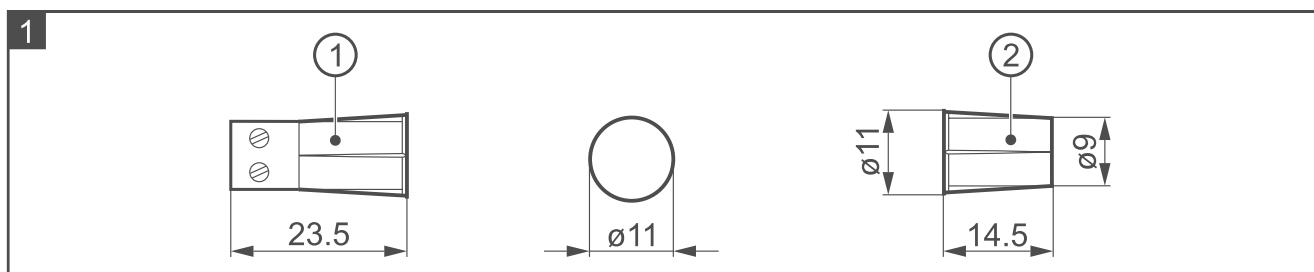

① reed switch

② magnet

2. Tips for installation



Disconnect power before making any electrical connections.

- The magnetic contact should be installed indoors, in spaces with normal air humidity.
- Install the magnetic contact in the upper part of the window frame. This will reduce the risk of flooding the magnetic contact when the window is tilted or open.
- Install the reed switch in the window frame / door frame (fixed surface).
- Install the magnet in the window / door (moving surface).
- Do not install the magnetic contact in ferromagnetic materials or in the vicinity of strong magnetic or electric fields.
- The object in which the reed switch or magnet are to be installed should be at least 10 mm thick to ensure adequate stability of the installed components.



Do not hammer the reed switch into the hole (you may break the reed switch).

3. Specifications

Magnetic contact type	NC
Maximum switching voltage	100 V
Maximum switching current	0.5 A
Maximum contact rating	10 W

Maximum contact resistance.....	0.2 Ω
Make distance.....	19 mm
Break distance	21 mm
Operating temperature range.....	-10°C...+55°C
Maximum humidity	93±3%
Environmental class according to EN50130-5	II
Reed switch enclosure dimensions.....	23.5 x 11 mm
Magnet enclosure dimensions	14.5 x 11 mm
Weight.....	6 g

The declaration of conformity may be consulted at www.satel.pl/ce