



DSF2000

Conventional sounder + flash

DSFA2000 is a conventional sounder with flash for fire alarm systems. It is composed of two parts: a base and a sound/flash diffusion head.

The diffusion of the sound quality is implemented by a piezoelectric cell in a housing specifically designed to optimize the audio performance. Its round shape allows wall or ceiling installation.

The device can be connected directly on the sounder line of the panel or of an EDL module.



Main characteristics

- Ceiling: up to 3m height – 8 m diameter
- Wall: up to 2,4 m height- 4,2m depth/width
- Flash Red colour
- IP21C
- Ceiling or wall mounting
- 3 different sounds
- 97 dB Sound Power@1m

Power supply specification

| | |
|---------------------------|----------------|
| Main supply voltage | 16Vdc to 58Vdc |
| Quiescent current (24Vdc) | <5mA max. |
| Alarm current (24Vdc) | <35mA |
| Flash Frequency | 0,58Hz |

Mechanical characteristics

| | |
|---------------------------|------------------------|
| Unit dimensions (in mm) | H:84 D:109 |
| IP Rating | IP21C |
| Maximum section of cables | 1 x 2,5mm ² |

Environmental characteristics

| | |
|-----------------------|--|
| Operating environment | From -10°C to +55°C with ≤ 93% non-condensing humidity |
| Storage environment | From -10°C to +55°C with ≤ 90% non-condensing humidity |

Other characteristics

| | |
|-------------|------------------------|
| Sound | French, English, Dutch |
| Led colour | Red, White |
| Isolator | By jumper JP1 |
| Sound Power | 2 selectable |



Non contractual document

Security Detection Direct Distribution
41 rue du saule trapu, ZA du moulin de Massy
91300 MASSY (France)


Tel : +33 (0)1 60 13 67 24
Fax : +33 (0)1 60 13 67 26
e-mail : sd3@sd3.net




DSF2000

Conventional sounder + flash


Connection on the sounder line

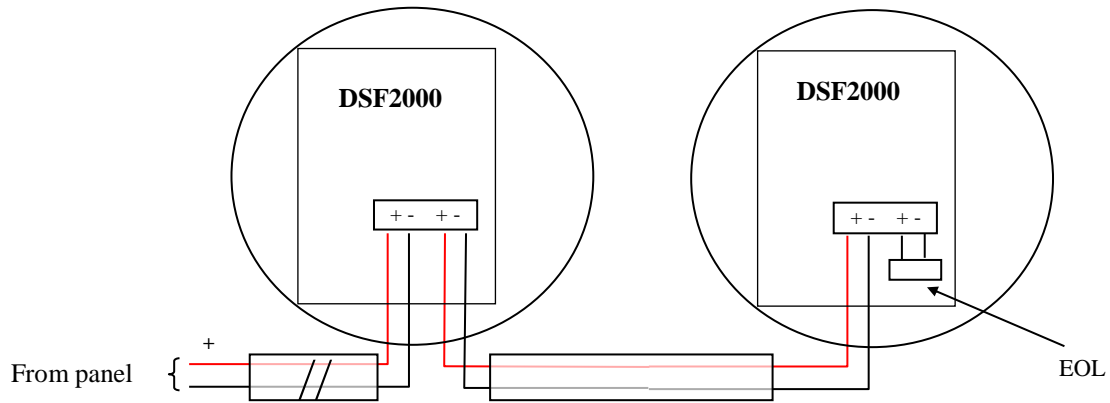

Coverage area

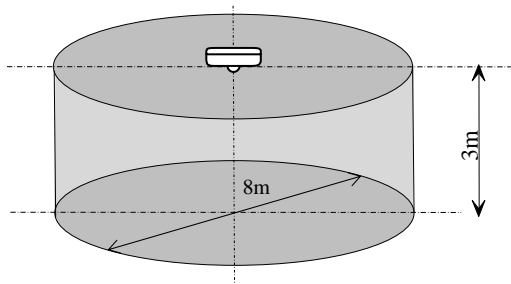

Maximum height of the device: 3m

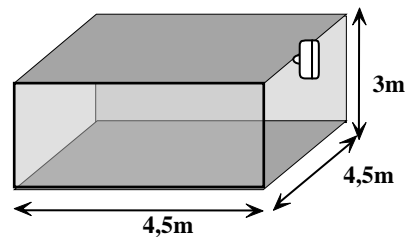

Wall installation

REFERENCE
DSF2000

DESCRIPTION
CONVENTIONAL SOUNDER + FLASH FOR FIRE ALARM SYSTEMS



Non contractual document

Security Detection Direct Distribution
41 rue du saule trapu, ZA du moulin de Massy
91300 MASSY (France)

Tel : +33 (0)1 60 13 67 24
Fax : +33 (0)1 60 13 67 26
e-mail : sd3@sd3.net