

# DH-PFB204WA

# Ant-corrosion Wall Mount Bracket



- $\cdot$  Elegantly designed with aluminum alloy and stainless steel.
- · Compatible with a variety of cameras.
- · Anti-corrosion wall mount bracket.







#### **System Overview**

Dahua Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

#### Scene

Ideal for mounting cameras, and works in temperatures ranging from  $-40\,^{\circ}\text{C}$  to  $+60\,^{\circ}\text{C}$  ( $-40\,^{\circ}\text{F}$  to  $+140\,^{\circ}\text{F}$ ) and in environments with a relative humidity of less than 90%.

Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Storage Humidity	10%-90% (RH)
Anti-corrosion Level	Moderate Protection

Ordering Information		
Туре	Model	Description
Camera Mount	DH-PFB204WA	Anti-corrosion Wall Mount Bracket

### **Technical Specification**


#### Structure

Casing Material	Stainless steel; aluminum alloy
Product Dimensions	160.0 mm × 125.6 mm × 76.0 mm (6.30" × 4.94" × 2.99") (L × W × H)
Appearance Color	White
Net Weight	0.46 kg (1.01 lb)
Gross Weight	0.54 kg (1.19 lb)
Load Bearing	1.0 kg (2.20 lb)
Installation	Wall mount
Applicable Model	Please see "Camera Accessories Selection"
Packaging Dimensions	128.0 mm × 81.0 mm × 170.0 mm (5.04" × 3.19" × 6.69") (L × W × H)


## Environment

Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Humidity	< 90% (RH)

## Installation

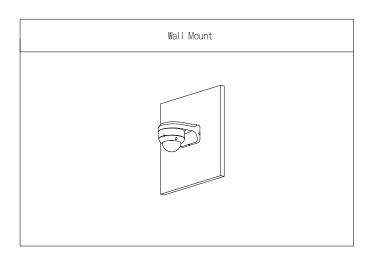

# Dimensions (mm[inch])



## **Package Information**

- · Anti-corrosion wall mount bracket × 1
- M4x10 screw  $\times 4$
- ST4×25 screws × 4
- Plastic expansion bolt × 4
- S3.0 wrench  $\times$  1