

# DH-PFM941I-59N/2-305

305m RG59 Coaxial Cable with Power Cable (RG59+2C)



## Features

- 305m RG59 with power cable, transmit both data and power, wooden spool in carton;
- Professional quality cable for use with most CCTV camera systems;
- Easy for storage and installation;
- Environmentally-friendly outer sheath, meet the CPR E class.


## Technical Specifications

<b>Model</b>		<b>DH-PFM941I-59N/2-305</b>
<b>RG59 Coaxial Cable</b>		
Conductor	Material	CCS
	Wire gauge	20AWG , 0.8mm(0.0314")
Insulation	Material	FPE
	Diameter	3.66mm±0.10mm(0.1440"±0.0039")
Shield	Material	Aluminum foil
Braid	Braiding Material	Al-mg wire (Aluminum magnesium alloy wire)
	Braiding Structure	0.12mm(0.0047")*112, 90%
Jacket	Material	PVC, meet the requirement of CPR E class
	Diameter	5.9mm±0.20mm(0.2322"±0.0078")
	Color	White
<b>Power Cable(2C)</b>		
Conductor	Material	CCA
	Wire gauge	0.30mm(0.0118")*7
Insulation	Material	HDPE
	Diameter	1.60mm±0.10mm(0.0629"±0.0039")
	Color	Red/black
Jacket	Material	PVC, meet the requirement of CPR E class
	Diameter	5.10mm*3.10mm±0.10mm(0.2007"*0.1220"±0.0039")
	Color	White
<b>General</b>		
Length		305m±0.1m (1000ft±0.32ft)
Impedance		75Ω±5Ω
DC Resistance		18.5Ω/305m
General	Working temperature	-20°C ~ +70°C (-4°F ~ +158°F)
	Storage temperature	-40°C ~ +80°C (-40°F ~ +176°F)
	N.W.	15.5kg(34.17lb)
	G.W.	17.5kg(38.58lb)
	Wooden reel dimension	Φ320mm*Φ320mm*280mm(12.59"*12.59"*11.02")
	Carton dimension	330mm*330mm*290mm(12.99"*12.99"*11.41")
	Packaging method	1 wooden reel in 1 carton

## Order Information

Type	Part Number	Description
Cable	DH-PFM941I-59N/2-305	305m RG59 Coaxial Cable with Power Cable (RG59+2C)

## Dimensions

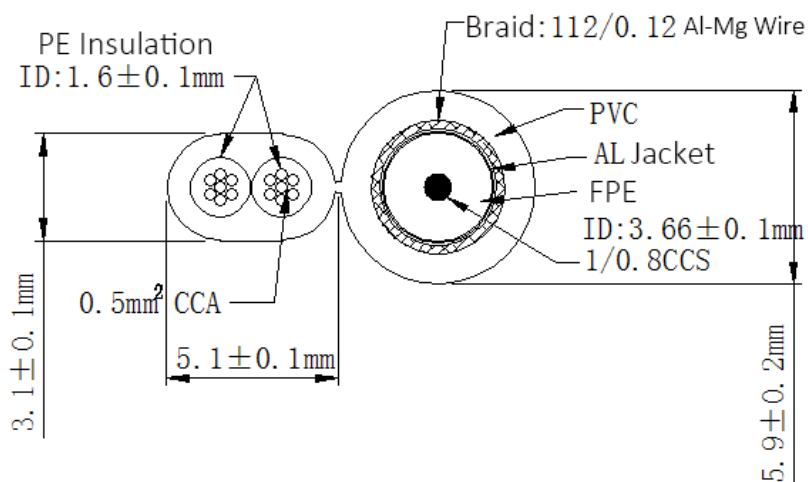

## Package Information

- 305m RG59 Coaxial Cable with Power Cable (RG59+2C) \*1