

# MP1000U 2 Zones Integrated Mixer Amplifier with Remote Paging



## *Features*

- 70V/100V & 4-16Ω speaker output
- Rated power 60/120/250/350W
- Built-in two zones of 100V output
- Built-in 4 Mic and 2 AUX and USB/FM/Bluetooth
- Support 2 remote paging stations
- Individual volume control for Mic 1-4 and Line 1-2
- Mic 2-4 with phantom power 48V and gain control
- Chime/Siren/Mute inputs with gain control
- Priority: EMC/MIC1/Remote Microphone/Short Circuit adjustable
- With 19" rack mount ears(optional)

## *Description*

The Integrated Mixer Amplifier MP1000U is a 2 zones mix amplifier integrated with the functions of U disk, radio, Bluetooth, zones and remote paging. With various functions, including clear screen display of status, EMC input, Mic input with phantom power, priority of inputs adjustable etc. The operation is very simple and user-friendly. The device can meet the requirements of the users and can be widely applied.

## Specification


Item	MP1000U
Rate power	350W
Speaker Outputs	70V/100V & 4-16Ω
THD	≅ 1%
Freq.response	80Hz-16kHz
Mic Input Sensitivity	5.0mV (±0.5mV)
AUX Input Sensitivity	775mV (±40mV)
Dimension(L×W×H)	418×338×88 mm
Net Weight	13.6kg



Clear Screen Display of Status



Mic Inputs with Phantom Power

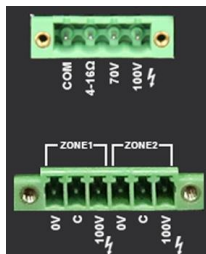


4-16Ω & 70V/100V Speaker Outputs



Dry contact inputs



EMC input

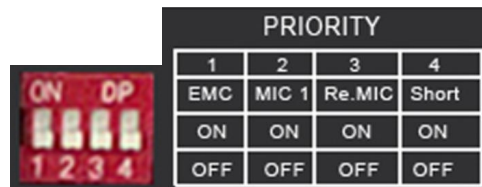

Priority of inputs adjustable